


MUTINA


Celosia Outdoor

by Patricia Urquiola

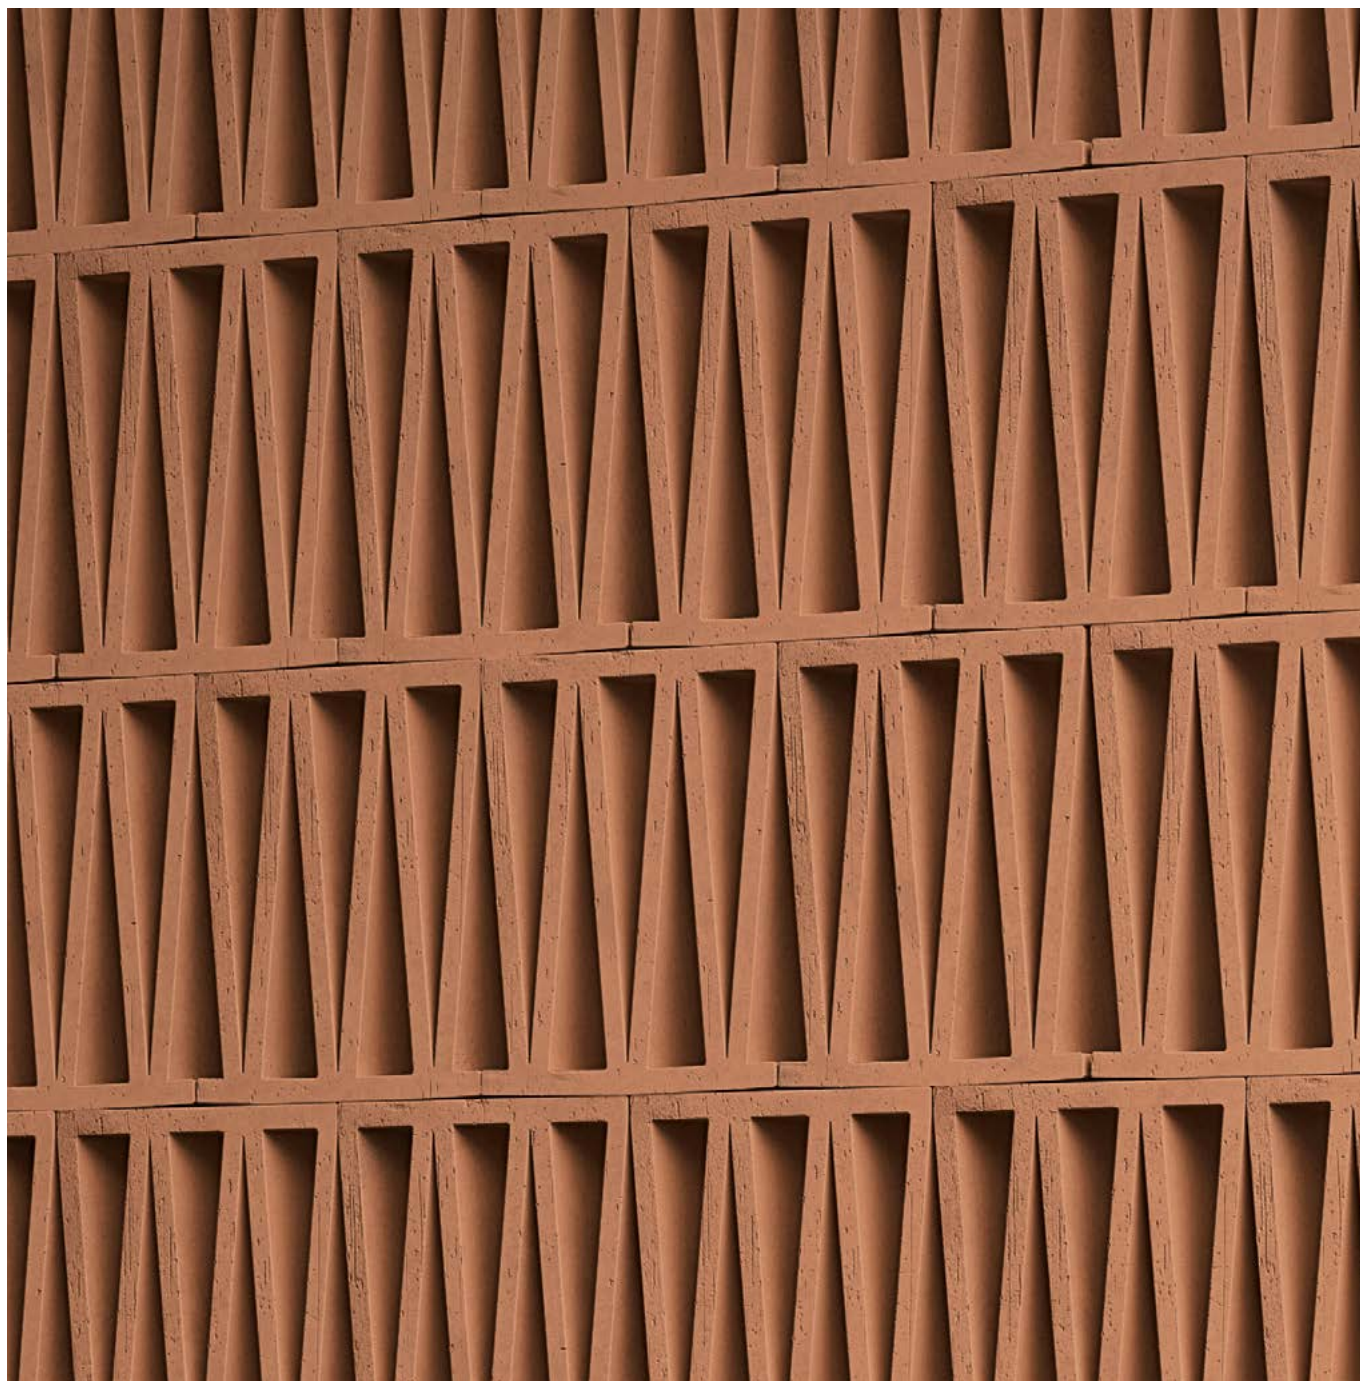

EN


General information
Laying and maintenance tips
Colors
Technical features
Packing

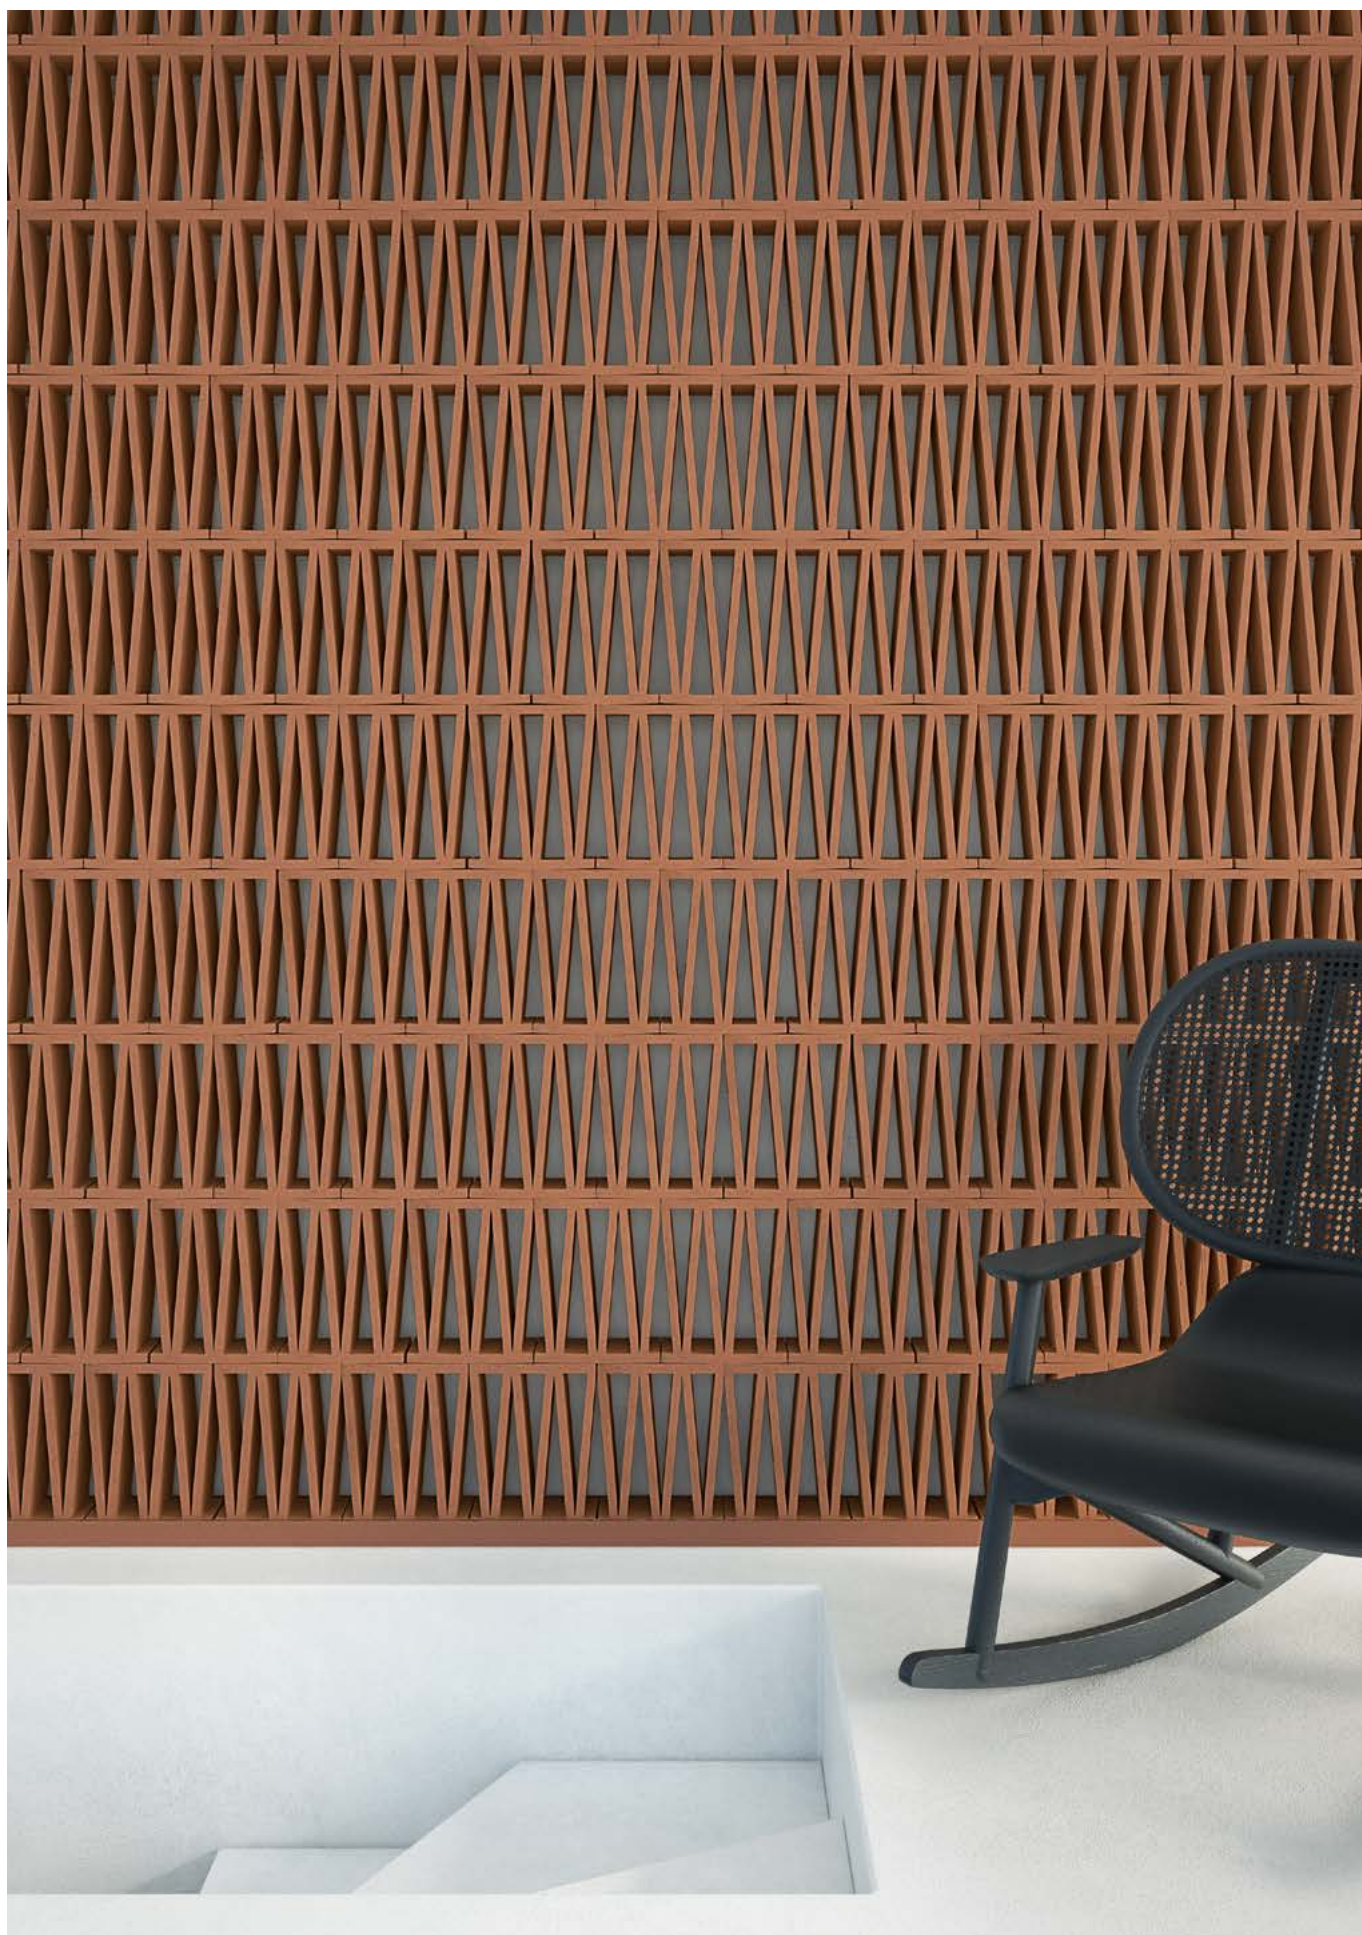

General information

The data, information and indications contained in this technical data sheet and in further documents relating to the Celosia Outdoor by Patricia Urquiola product are the exclusive property by Ceramiche MUTINA S.p.a. This Technical Data Sheet provides the buyer with information relating to the use of the product useful for its correct installation and evaluation and prevention of risks arising from the normal use of the same.


collection	Celosia Outdoor
design	Patricia Urquiola, 2025
production	Artisanal
material	Extruded terracotta
nominal sizes	20,5-26,5-10 cm (8"-10"-4")
specification	– Artisanal extruded partition elements, 10cm thick. – This product is suitable for both residential and commercial spaces to construct walls with a maximum height of 4 metres. The buyer is not released from the obligation of checking the information received, and for making design and construction choices in compliance with good construction techniques and regulations, including local ones, in force at the time of use of the product and in the country of final destination. The NTC 2018 DECRETO MIN 27/01 regulation shall apply in Italy. – In order to achieve an optimal aesthetic outcome we advise to install Celosia Outdoor using our wooden profile. The profile is painted and suitable for outdoor use. A top profile with removable sides is provided for ceiling fixing. – As complementary pieces Mutina provide the Mutina adhesive, EC 1 plus for VOC emissions. – The product is suitable for outdoor areas complying with UNI EN 772-22 marked "F2-extreme exposure".
complementary pieces	Linear profile 300, top profile 300.
awards	Interior Design's Best of Year 2018 German Design Awards 2020
category	UNI 11128/2004




20,5-26,5-10 cm
8"-10"-4"

complementary pieces

Linear painted willow profile (also suitable for outdoor use).
Top painted willow profile (also suitable for outdoor use) with one shaped end to make clamping easier.

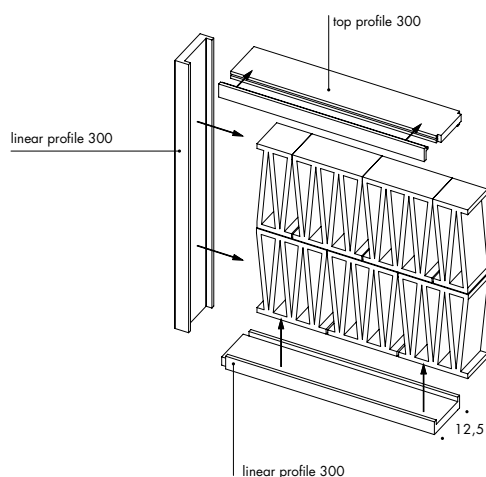

section




colour



To make the installation of these items easier, a Mutina adhesive is now available: organic, eco-friendly and sold separately.

wall anchoring scheme

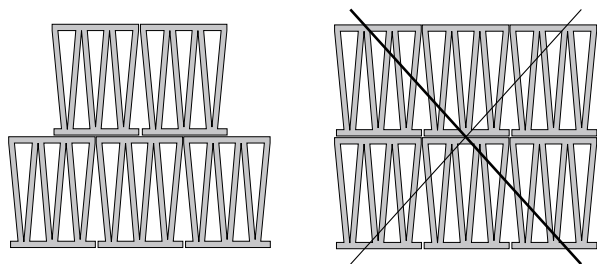


For security reasons only staggered installation is strictly allowed.

Standard installation suggestions have been tested by Mutina and certified by the Giordano Institute. | [DOWNLOAD THE DOCUMENT](#)

Fisher long shaft fixing SXR 8x80


ANCHORING ON 2 SIDES

Max h 400 cm




ANCHORING ON 3 SIDES

Max h 400x300 cm



ANCHORING ON 2 SIDES

MAX h250x100 cm



Laying and maintenance tips

use	Wall – outdoor in extreme exposure areas
installation	For security reasons only staggered installation is strictly allowed. For installation process see the installation video (psw mutina).
recommended adhesive	Mutina adhesive: solvents-free, eco-friendly organic adhesive
recommended joints	–
recommended fillers	–
cleaning at the end of installation	Avoid drippings during installation. If needed the excess can be removed after the product has dried, using a tool with a sharp edge.
general cleaning (installed tiles)	–
calibers (real size)	20,5 x 26,5 x 10 cm with 3 mm tolerance (artisanal product)

Colours



Technical features

STANDARD	FEATURES	VALUE REQUIRED	CELOSIA OUTDOOR
UNI EN 772-16	dimensions	to declare	T2 – R2
UNI EN 772-21:2011	water absorption	to declare	12.5%
UNI EN 772-5:2016	content of active soluble salts	to declare	S2
UNI EN CEN/TS 772- 22:2006	freeze-thaw resistance	to declare	F2
D.M. 1401/2008	determination of horizontal variable loads	to declare	C2
LEED CERTIFICATION 4.1			10% recycled material
VOC EMISSION			available upon request
DECLARATION OF CONTENTS			available upon request
SDS			available upon request
BPD3			available upon request
HDP			available upon request

Packing

SIZE	PCS-SQM	PCS-PAL	SQM-PAL	KG-PC	KG-PAL
20,5-26,5-10 cm	18,41	32	1,74	5,50	176,00